
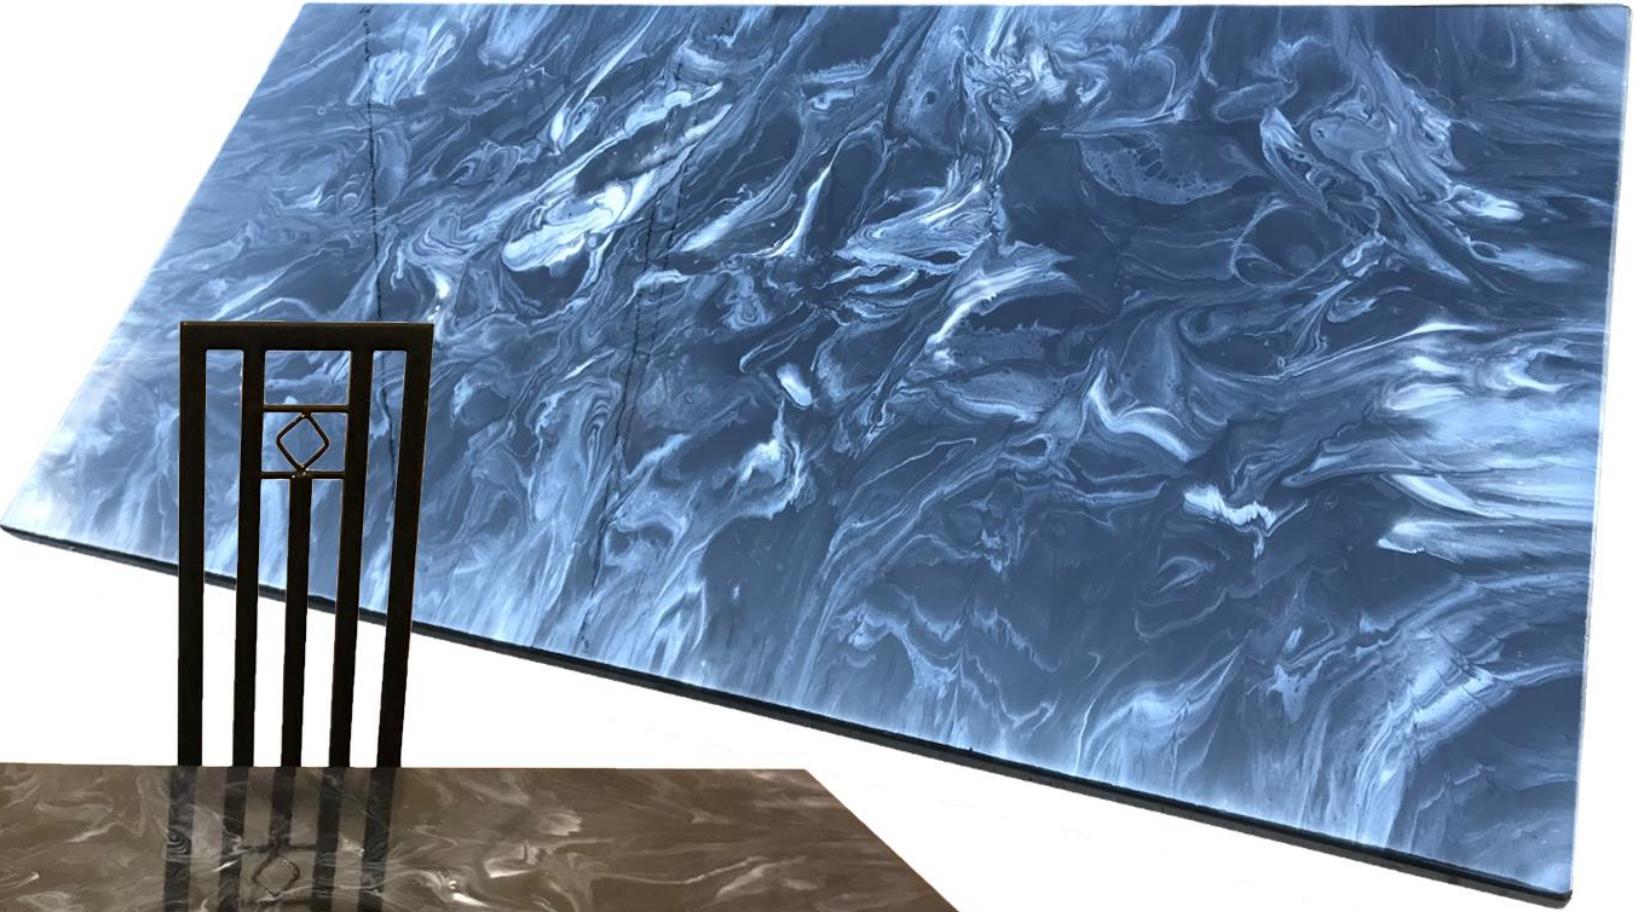


# gm

Glob Marble

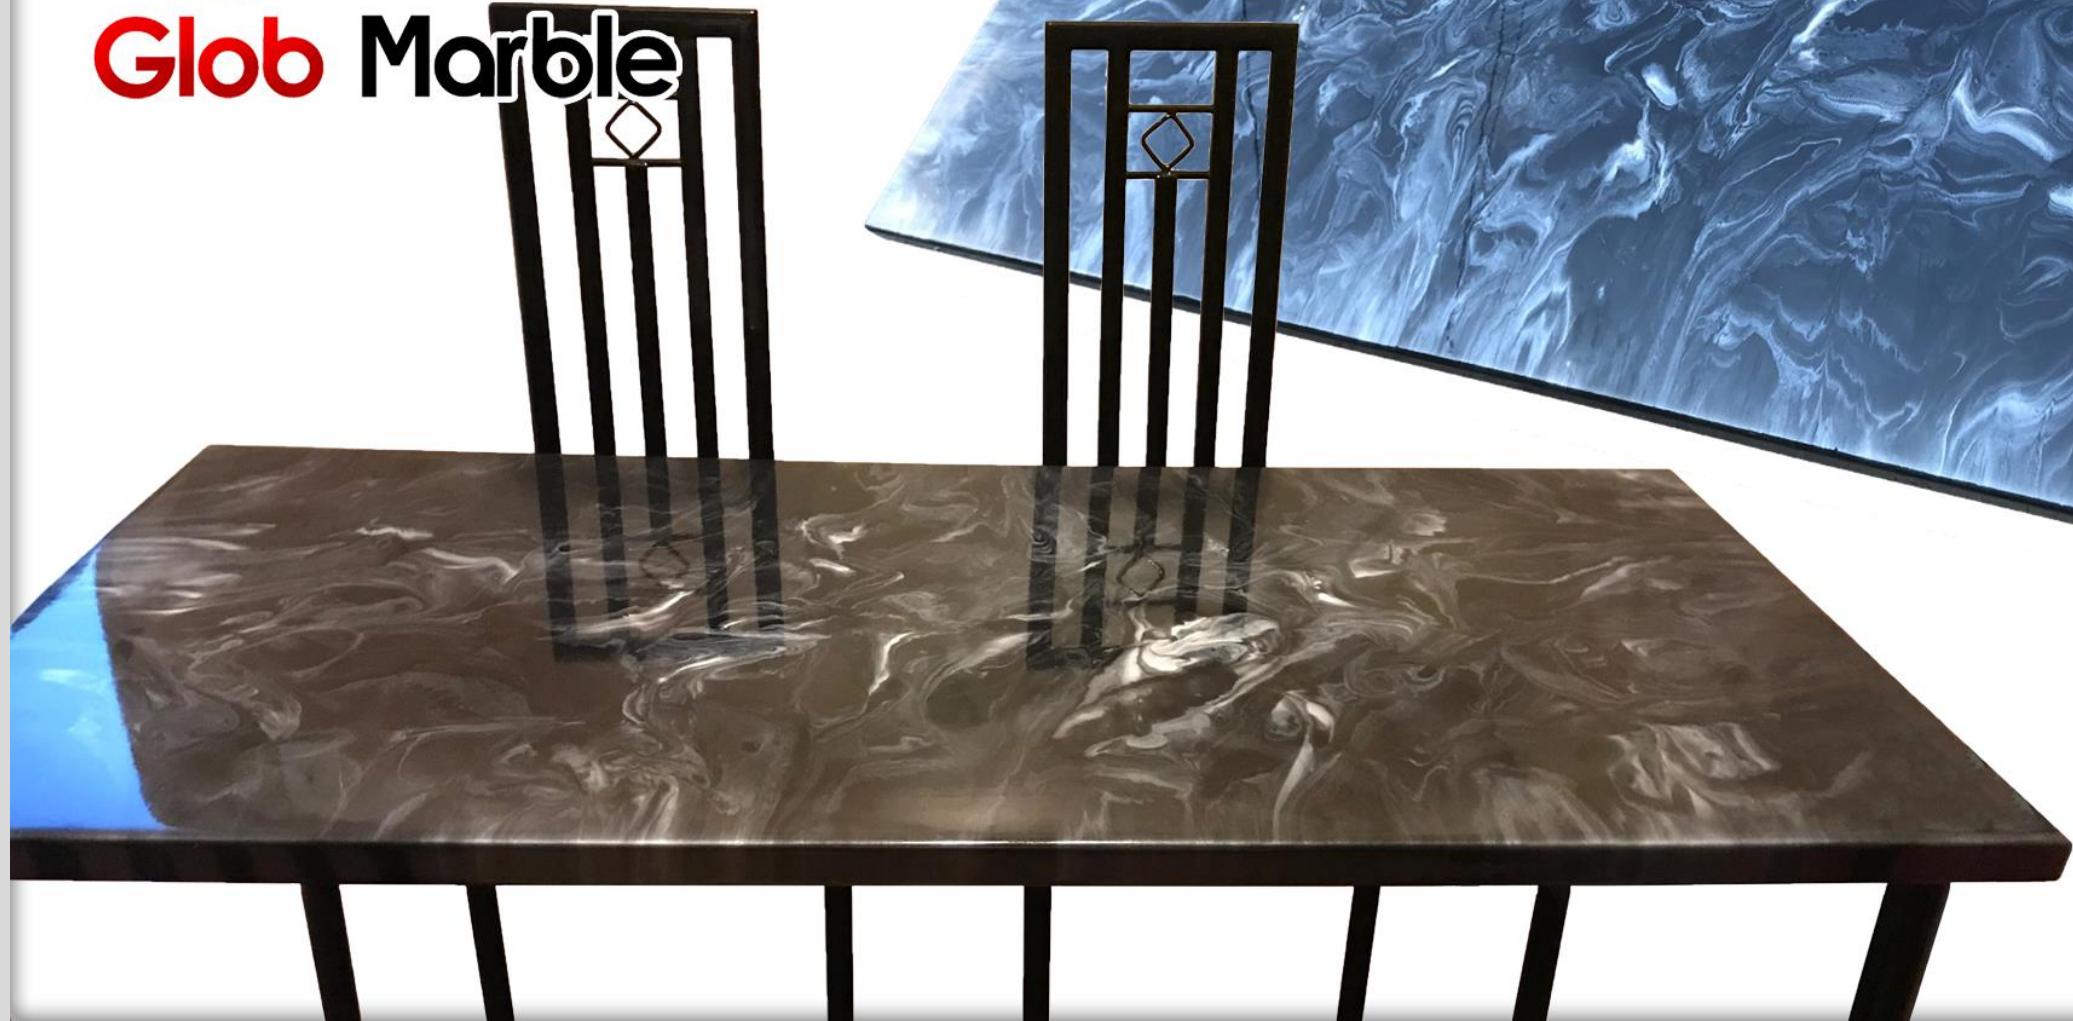

1

Find a  
boring table  
you want to  
remake



2

Sand down the  
surface and round  
out the edges  
(Epoxy works better with  
rounded edges)



3


Wipe clean  
with alcohol






A thin layer of our epoxy could be used as a primer too!  
(This is the method we will use)

Use our primer to ensure a proper bond. The darker your colors are, the darker your primer should be too.  
(Our primers are available in white, gray and black)

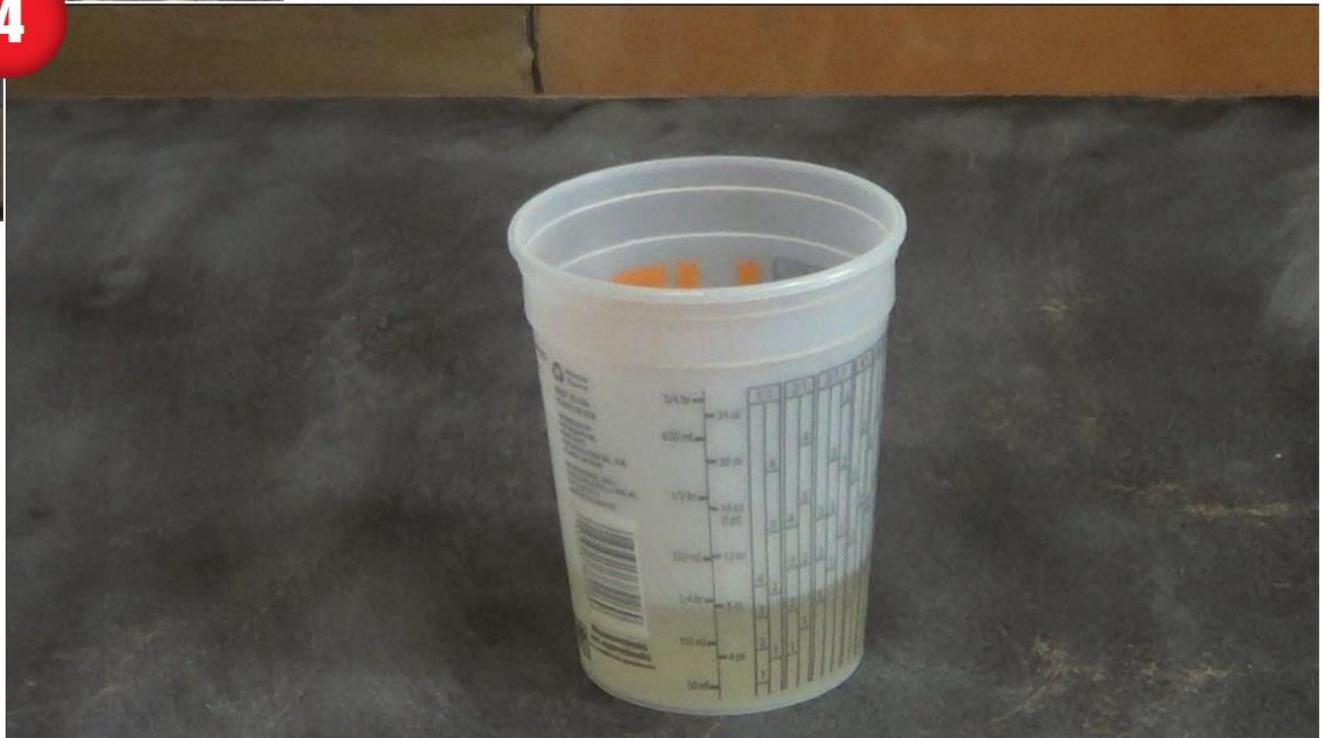

5

**Color the PART B of your primer layer to suit your face coat with any epoxy pigment. We used our black Metallics.**

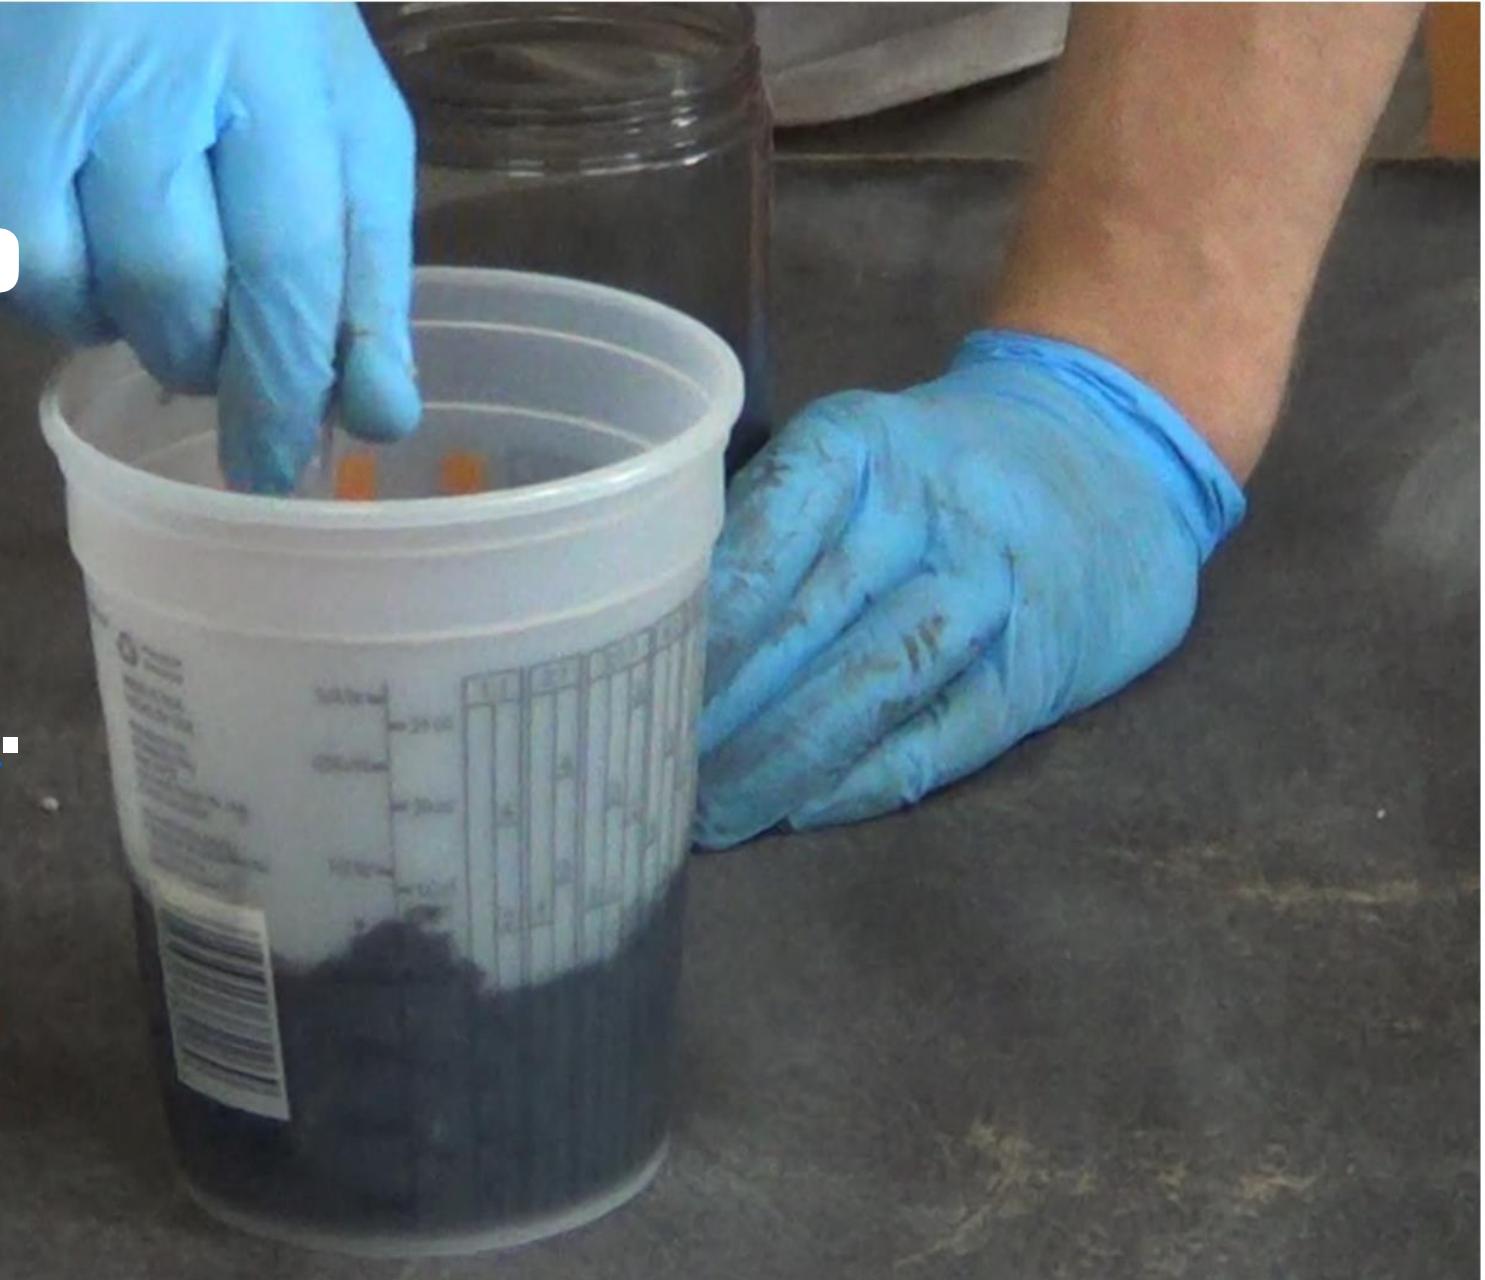

6

**Wait 24 hours for metallics to fully dissolve.**



**After 24 hours, add the Part A to the mix. The ratio is 2 Parts A to 1 Part B**



6



**Mix them together thoroughly for a couple of minutes, making sure to scrape the edges of your container.**

**Pour, squeegee,  
and torch. Make  
sure to spread the  
primer coat  
evenly!**

7




8



9




**The propane  
torch is used  
to remove  
bubbles from  
your surface**

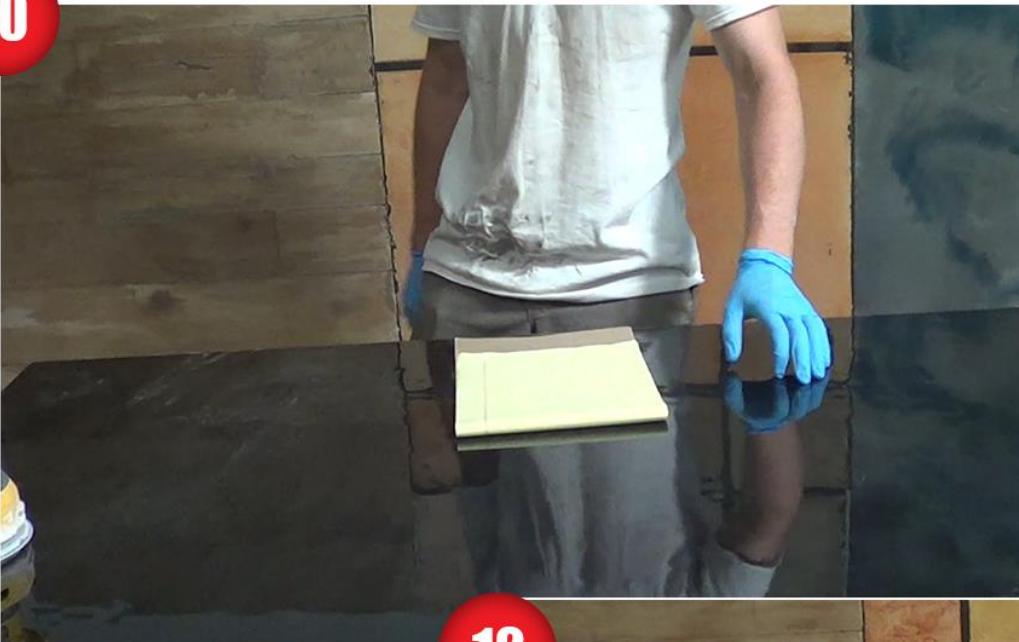**10****11****12**

**Once the primer coat cures, sand it down with 220 grit sanding paper, and wipe it down with denatured alcohol**

**PRO TIP**  
**WHEN WORKING**  
**WITH EPOXY,**  
**DENATURED**  
**ALCOHOL IS**  
**YOUR BEST**  
**FRIEND!**

**Level your table, mix the Part A & Part B of your face coat (which you have pigmented 24 hours ago) and mix them thoroughly**

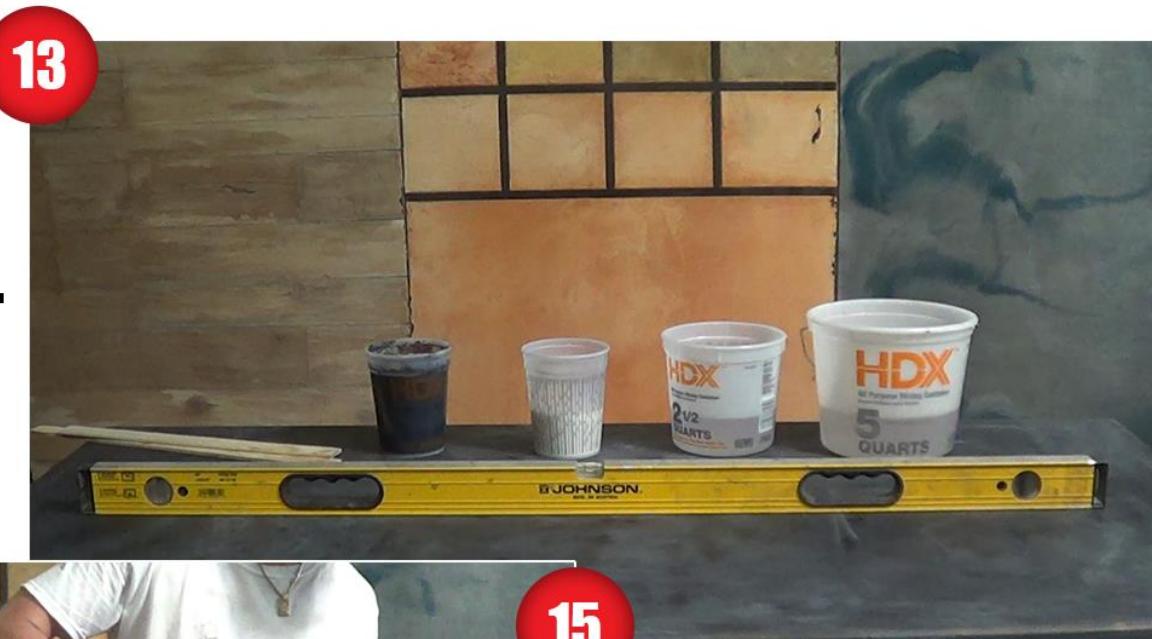

**Always remember to scrape the sides of your buckets, to avoid pouring unmixed material.**

16



17



18




Be sure to torch your surface once textured!

**Create a polka dot pattern with one of the colors, and fill in the rest of your table with the other color**

**Use a plastic spoon to create a random pattern. DO NOT make the same motion with your arm! This creates a boring pattern!**

**Don't forget  
to fix the  
edges!**

19

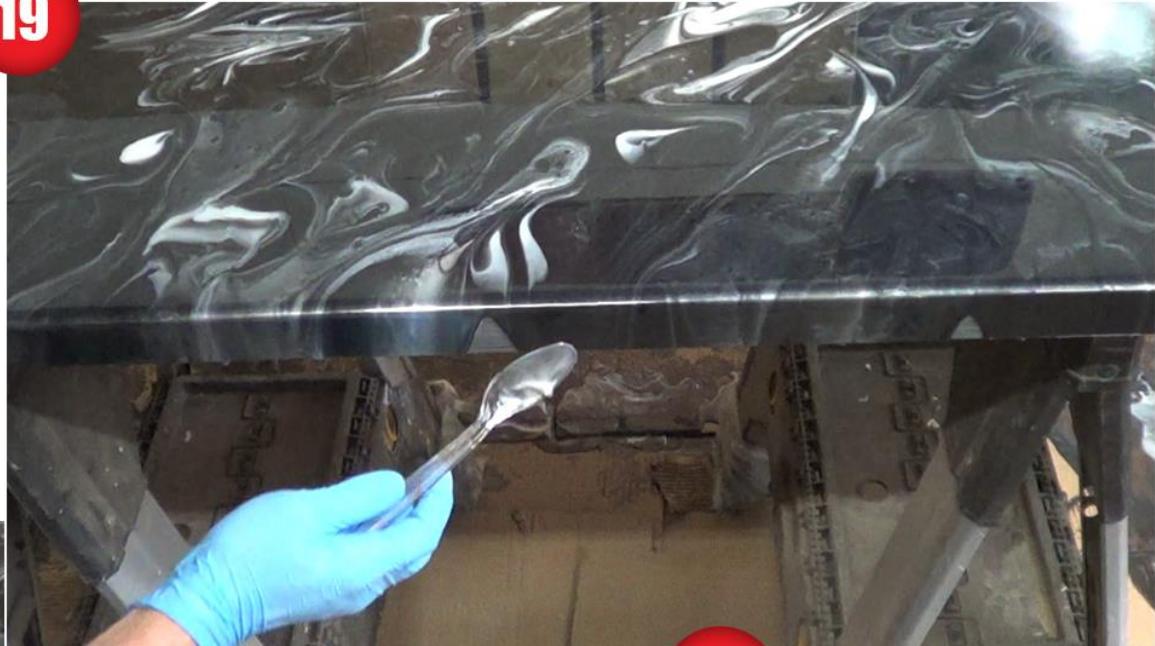


20



21



**Just cover the  
bald spots with  
epoxy, and let  
gravity do the  
rest!**

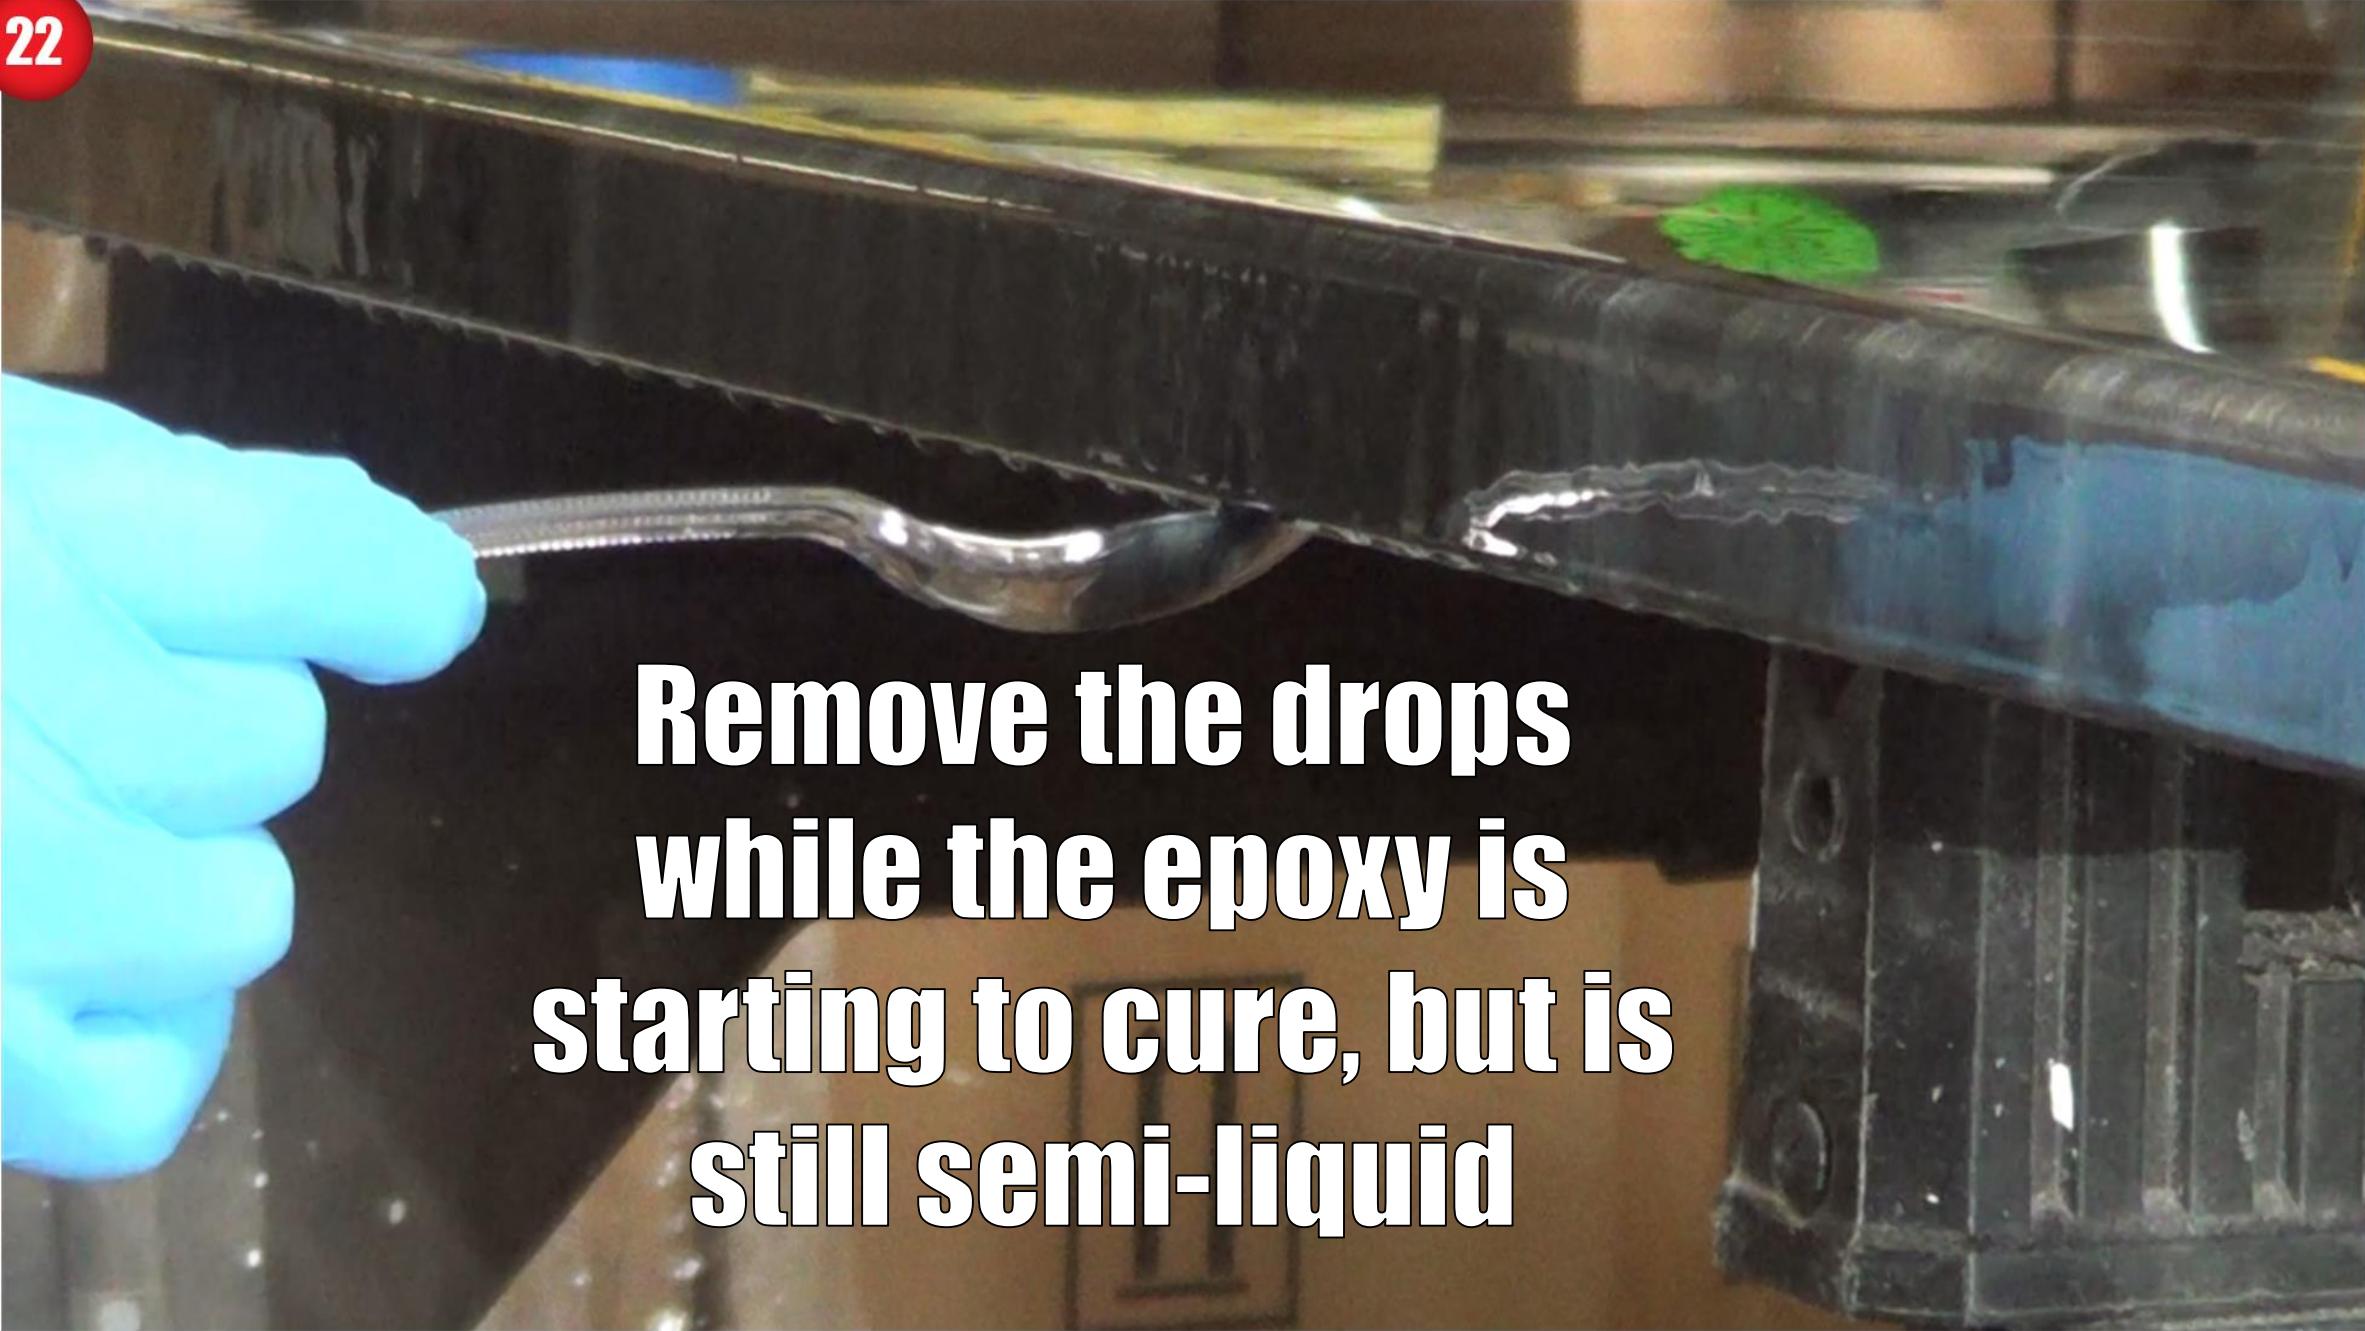

**Remove the drops  
while the epoxy is  
starting to cure, but is  
still semi-liquid**

**Wait for the epoxy to cure. If any imperfections occur (dust/bugs in epoxy) you can sand the surface down, and cover it with a clear coat.**

**Epoxy is a very forgiving thing to work with!**



24

Sand down the remaining drops under your table, install the legs, and enjoy!



**Watch the full video on the GlobMarble YouTube channel or on  
GlobMarble.com**

